

NOTICE TO BIDDERS

On behalf of the Ottawa County Commissioners, sealed bids will be received in the Office of the Ottawa County Clerk, Robyn Mitchell, at 102 East Central Avenue, Suite 103, in Miami, Oklahoma 74354, until 9:05 AM on October 13, 2026. Bids will then be opened and publicly read aloud by the Ottawa County Board of Commissioners on the following:

OTTAWA COUNTY DEBRIS REMOVAL, RIPRAP REPLACEMENT, AND BRIDGE REPAIR PROJECT

S 655 Rd over Fivemile Creek
Local Bridge #15, NBI 26545
Intersection of S 655/E 22 Road and S 657 Rd. approx. 7.5 miles east of Picher, OK
36° 59' 0.78" N, 94° 41' 30.72" W
Ottawa County, Oklahoma

PROJECT DESCRIPTION: Provide repair services to Ottawa County for Local Bridge #15, which was recently damaged in a flood event.

Scope of Work

1. Primary project scope:

- a. Reinforce the recently repaired bridge.
- b. Clear trees.
- c. Remove concrete debris.
- d. Divert the stream on the north side from east to west.
- e. Construct a service road.
- f. Move existing gravel to the east bank and grade/level as needed.

2. Bridge Repairs

- a. The County has previously completed emergency repairs to reopen the bridge;
- b. The primary repair area of focus is the northeast side of the bridge where the failure occurred.
 - i. The Contractor will provide labor and equipment.
 - ii. The County will furnish fill and riprap materials.
- c. The Contractor shall reinforce the bridge utilizing a blend of fill material, riprap, and concrete.

3. Tree Removal

- a. Contractor shall clear trees on the North side of the bridge and leave them in piles for burning;
- b. Approximate area to be cleared is 125 feet North of riprap toe & 175 feet from West bank.
- c. No hauling or disposal is required.

4. Concrete Removal

- a. Remove existing concrete from the creek flow path on the northwest side of the bridge, and move it to northeast side of the bridge, and
- b. Use it to armor the toe of the riprap at the bottom of the slope.

5. Stream Diversion

- a. On the North end of the work area, divert the creek's eastern bank approximately 150 feet to the West.

- i. Restore the channel to its original alignment.
 - ii. Identify riprap locations and sizes.
 - iii. Show a typical 1:3 creek slope section with riprap detail.
- 6. Service Road Construction
 - a. Contractor shall construct a service road and tie to existing riprap on the North side going West to the toe of riprap under the bridge on the east side.
- 7. Gravel Relocation
 - a. Contractor shall utilize gravel from the East bank to grade/level as needed.
- 8. Site Information
 - a. No survey has been completed for the project site.
 - b. Aerial CAD imagery was utilized to identify channel regrading areas.
 - c. Disclaimer: no survey has been completed, flow velocities have not been determined, and the package does not constitute a fully engineered design.
 - i. Any required shoring or formwork will be designed by others *at the contractor's expense and responsibility*.
- 9. 404 Permit Avoidance
 - a. Disturbance area *must* be less than 0.5 acre of fill.
 - b. Contractor shall follow all required environmental guidelines and requirements for stream mitigation.

10. Schedule:

The Contractor shall begin work not later than 21 days following contract award.

The Contractor will have 60 days to complete the work.

11. Bid Items:

The Bid shall include the following: Labor, Equipment, Tools, Materials, and Incidentals.

Quantities are estimated and include a temporary work road. Included in the **LUMP SUM bid**:

ODOT #	DESCRIPTION	QTY	UNIT
201(A) 0102	Clearing and Grubbing	1	LSUM
202(A) 0183	Unclassified Excavation	484	CY
221(C) 2801	Temporary Silt Fence	400	LF
221(F) 0100	Temporary Silt Dike	56	LF
230(A) 2806	Solid Slab Sodding	400	SY
*402(E) 0225	Traffic Bound Surface Course Type E	300	TON
*601(B) 1353	Type I Plain Riprap	1140	TON
*601(C) 1355	Type I Filter Blanket	225	TON
619(A) 0930	Removal of Structures & Obstructions	1	LSUM
880(J) 8905	Construction Traffic Control	1	LSUM
220 2800	SWPPP Documentation and Management	1	LSUM
641 1399	Mobilization	1	LSUM

The 2019 OKLAHOMA STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION – ENGLISH will be used for all labor, equipment, materials, tools, and incidentals required to remove the debris and repair the riprap slopes.

* Quantities estimated for project bidding calculations. Materials to be provided by the County.

Title 61 O.S. 107 Contractors must submit a bid bond equal to 5% of the bid submitted, or a certified check which shall be deposited with the awarding public agency.

Title 61 O.S. 113 B (3) Contract must submit a warranty bond in a sum equal to the contract price.

Title 61 O.S. 113 B (4) Contractor must provide evidence of public liability and workers' compensation.

Title 61 O.S. 113 C Contractor may provide a single bond that covers payment, performance and warranty. Contract will not be excused until all bonds and insurance are provided.

A Mandatory Pre-Bid Conference and Project Site Visit is scheduled for September 28, 2026 @ 12:00PM. The meeting shall begin at the S 655 Rd over Fivemile Creek Local Bridge #15, NBI 26545 Intersection of S 655/E 22 Road and S 657 Rd. approx. 7.5 miles east of Picher, OK 36° 59' 0.78" N, 94° 41' 30.72" W Ottawa County, Oklahoma . All prospective bidders are required to attend the Pre-Bid Conference and Project Site Visit in order to be considered a Responsive Bidder. As verification of attendance, the prospective bidder representative must complete the Pre-Bid Conference/ Project Site Visit sign on sheet.

Engineering standard questions shall be directed to:

Brad Folks, P.E.
Guy Engineering Services, Inc.
201 NW 63rd St., Ste 100
Oklahoma City, OK 73116
405-608-4217
Brad@guyengr.com

Non-engineering questions shall be directed to:

Mike Furnas, Commissioner
Ottawa County, District 1
102 E Central, Ste 104
Miami, OK 74354
918-961-0830

No questions will be accepted within 5 days prior to the bid due date.

Special Note: The project shall be an Ottawa County project funded with local County funds. This bid and contract are for labor, equipment, tools, and incidentals to comply with this Scope of Work and ODOT specifications.

Disclaimer: All work shall be executed, completed, and maintained in strict accordance with the contract documents and applicable standards, **to the full satisfaction of the County**. The Contractor shall comply with all instructions, directions, and clarifications issued by the County to ensure quality, safety, and performance requirements are met.

Bids submitted **must be clearly marked on the outside of a sealed envelope:**

BID 2026-2027.9: Bridge 15 Fivemile Creek Debris Removal, Riprap Replacement, and Bridge Repairs

OPEN: OCTOBER 13, 2026 @ 9:05 AM

and must be accompanied by a completed and notarized "Statement of Non-Collusion" as required by O.S. 74, Section 85.22.

The successful bidder must comply with O.S. 19, Chapter 33 (Purchasing Procedures).

Bids received late will be returned unopened.

The Board of County Commissioners reserves the right to reject any or all bids and/or make an award to other than the low bidder, if such an award is deemed to be in the best interest of the County.

Robyn Mitchell
Ottawa County Clerk

Picture #1 - North side of bridge looking upstream



Picture #2 - East bridge approach looking at washed out material beneath wing wall from bridge deck



Picture #3 - Stream level looking upstream at eroded embankment



Picture #4 - Stream level looking south at the abutment wall with washed out approach material



Picture #5 - Looking at east abutment wall with washed out approach material




Picture #6 - South east end of bridge erosion around culvert



Picture #7 – Below bridge looking west



Typical riprap cross section

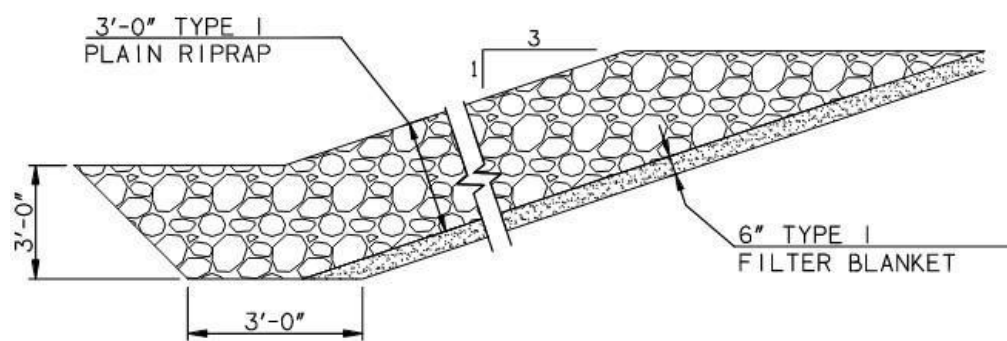

OTTAWA COUNTY CLERK
102 EAST CENTRAL AVE, SUITE 104
MIAMI, OK 74354
PHONE (918) 542-3332
FAX (918) 542-8260
county.clerk@ottawaok.gov

INVITATION TO BID

BID 2026-2027.9: Bridge 15 Fivemile Creek Debris Removal, Riprap
Replacement, and Bridge Repairs
ISSUED: August 24, 2026
OPEN: October 13, 2026 @ 9:05 AM

LUMP SUM BID:

Total project bid amount: \$_____

Please include project breakdown of expenses for project on separate invoice and attach to bid packet.

The contractor shall begin work within 21 days following contract award. The contractor will have 60 calendar days to complete.

This bid includes labor, equipment, materials, tools, incidentals, and insurance.

Ottawa County reserves the right to reject any and all bids that are not according to the specifications.

Submitted

By: _____ Title: _____

Email Address: _____

Company: _____

Address: _____

Contact person: _____ Phone #: _____

Federal Tax I.D. Number: _____

CONDITIONS OF BID

On behalf of the Ottawa County Commissioners, sealed bids will be opened in the Office of the County Commissioners located in the Ottawa County Courthouse at 102 East Central Avenue, Suite 104 in Miami, Oklahoma, at the time and date shown on the Invitation to Bid.

Late bids will not be considered. Bids must be received in sealed envelopes with Bid Number, Date, and Time written on the outside of the envelope.

Unit prices will be guaranteed correct by the bidder.

Firm prices will be FOB Ottawa County.

Purchases by Ottawa County, Oklahoma are not subject to State or Federal taxes.

This bid is submitted as a legal offer and any bid, when accepted by the County, constitutes a firm contract.

Oklahoma laws require each vendor submitting a bid to a County for goods or services to furnish a notarized sworn Statement of Non-Collusion (form supplied below).

NOTE: Other terms and conditions may be added at the discretion of county officers.

STATEMENT OF NON-COLLUSION

AFFIDAVIT: I, the undersigned, of lawful age, being first duly sworn on oath say that he (she) is the agent authorized by the bidder to submit the above bid. Affiant further states that the bidder has not been a party to any collusion among bidders in restraint of freedom of competition by agreement to bid at a fixed price or to refrain from bidding; or with any state official or employee as to quantity, quality or price in the prospective contract or any other terms of said prospective contract; or in any discussions between bidders and any state official concerning exchange of money or other thing of value for special consideration in the letting of a contract; that the bidder/contractor has not paid, given or donated or agreed to pay, give or donate to any officer or employee of the State of Oklahoma (or other entity) any money or other thing of value, either directly or indirectly, in the procuring of the award of a contract pursuant to this bid.

Subscribed and sworn to this _____ day of _____, 20____ .

(Seal)

Firm: _____

Signed: _____

Address: _____

Notary Public _____

City: _____ State: _____

My commission expires: _____ Zip: _____

I CERTIFY COPIES OF **BID 2026-2027.9**: Bridge 15 Fivemile Creek Debris Removal, Riprap Replacement, and Bridge Repairs were mailed or emailed to the following vendors on September 14, 2026.

Sherwood Construction
Ron Egge
1640 S 101st E Ave
Tulsa, OK 74128
(918) 266-6861
sherwoodestimator@sherwood.net ron.egge@sherwood.net

Crossland Heavy Contractors
Delissa Beard
14149 E Admiral Pl
Tulsa, OK 74116
(918) 438-2800
dbeard@heavycontractors.com

Jensen Construction Mike Nissen
PO Box 9919
Tulsa, OK 74157
(918) 245-6691
mnissen@jensenconst.com

Becco Contractors
PO Box 9159
Tulsa, OK 74157
(918) 445-2684
estimator@beccousa.com

Scott Sharpensteen
PO Box 176
Commerce, OK 74339

Service Solutions
605 Henley Blvd
Miami, OK 74354

Central Contractors, Inc
PO Box 1246
Muskogee, OK 74402

Kim McCord
Ottawa County 1st Deputy/Purchasing Agent

NOTE: Areas of repair are approximate. Contractor will confirm start and stop locations with the County prior to beginning construction.

REDIRECT FLOWLINE AS
REQUIRED FOR CHANNEL
BANK REPAIRS AND AS
APPROVED BY THE COUNTY

RIPRAP PLACE
AT MAX SLOPE OF
2H:1V

CONST. 14'
WIDE SERVICE ROAD

BREAKUP AND REMOVE CONCRETE
BARRIERS TO FLOW LINE ELEVATION
(SEE PICTURE #7)

APPROACH AREA
(REPAIRED BY COUNTY)

REGRADE WITH COMPACTION EQUAL
TO SURROUNDING IN-SITU MATERIAL
TO ORIGINAL GRADE AND RE-SOD.
(SEE PICTURE #6)

